


# POWER DISTRIBUTION BOARD

HORIZONTAL - 2RU - 19" RACK MOUNT - 93500-42

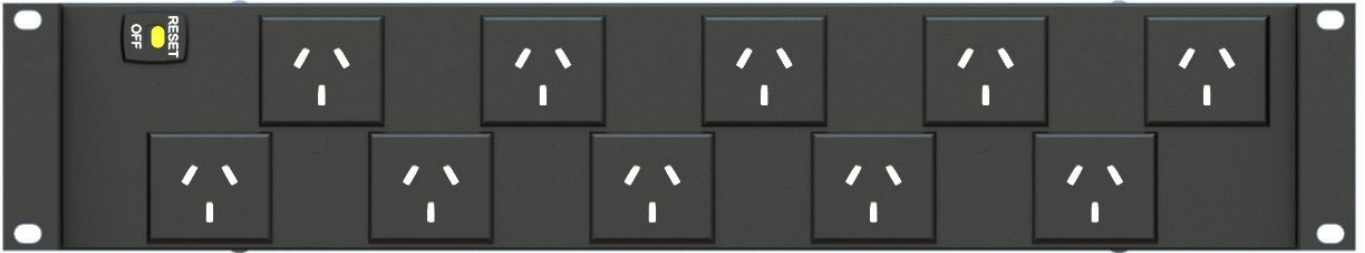

**PCB Mounted 10A AUS Outlet Socket 240V AC - 50Hz single phase**  
 Metalwork assembled - 1.0mm Galvaneal Steel Powder Coat Black Sable (Textured)

| SPECIFICATIONS        |   |
|-----------------------|---|
| Part No               | <b>93500-42</b>   |
| Input Voltage         | <b>240V AC</b>  |
| Input Current (Phase) | <b>10A</b>  |
| Max Input Power       | <b>2400 watts</b>   |
| Input Phases          | <b>Single Input</b>   |
| Input Type            | <b>AUS Outlet Screw Lock Plug<br/>10A 3 Flat Pin (AS3112)</b> |
| Lead Length           | <b>2.5M - Black</b>   |
| Control Function      | <b>Circuit Breaker 10A<br/>Reset Overload Protection</b>      |
| Outlet Type           | <b>10A AUS Outlet (AS3112)</b>                                |
| Outlet Quantity       | <b>10</b>   |
| Outlet Colour         | <b>Black</b>  |
| Fittings Supplied     | <b>M6 Rack Studs x4</b>                                       |

| DIMENSIONS             |   |
|------------------------|---|
| Dimensions             | <b>19" Rackmount<br/>483mm L x 88mm H x 100mm D<br/>Recessed</b>  |
| Weight                 | <b>1.6kgs</b>   |
| Country of Manufacture | <b>Australia</b>  |
| Compliance             | <b>AS/NZS 3100:2022</b> (General Requirements for Electrical equipment)<br><b>AS/NZS 3000:2018</b> (Electrical installations - wiring rules)<br><b>Designed to be installed in 19" Server Racks</b> |
| Packaging              | <b>Sealed Plastic Bag</b>   |
| Assembly Instructions  | <b>Refer to Website</b>   |
| Installed              | <b>Fitted to customer specified position in Server Rack</b>   |



**Screw Lock Plug**  
 10A 3 Flat Pin (AS3112)